

ROWING MACHINE

OWNER'S MANUAL

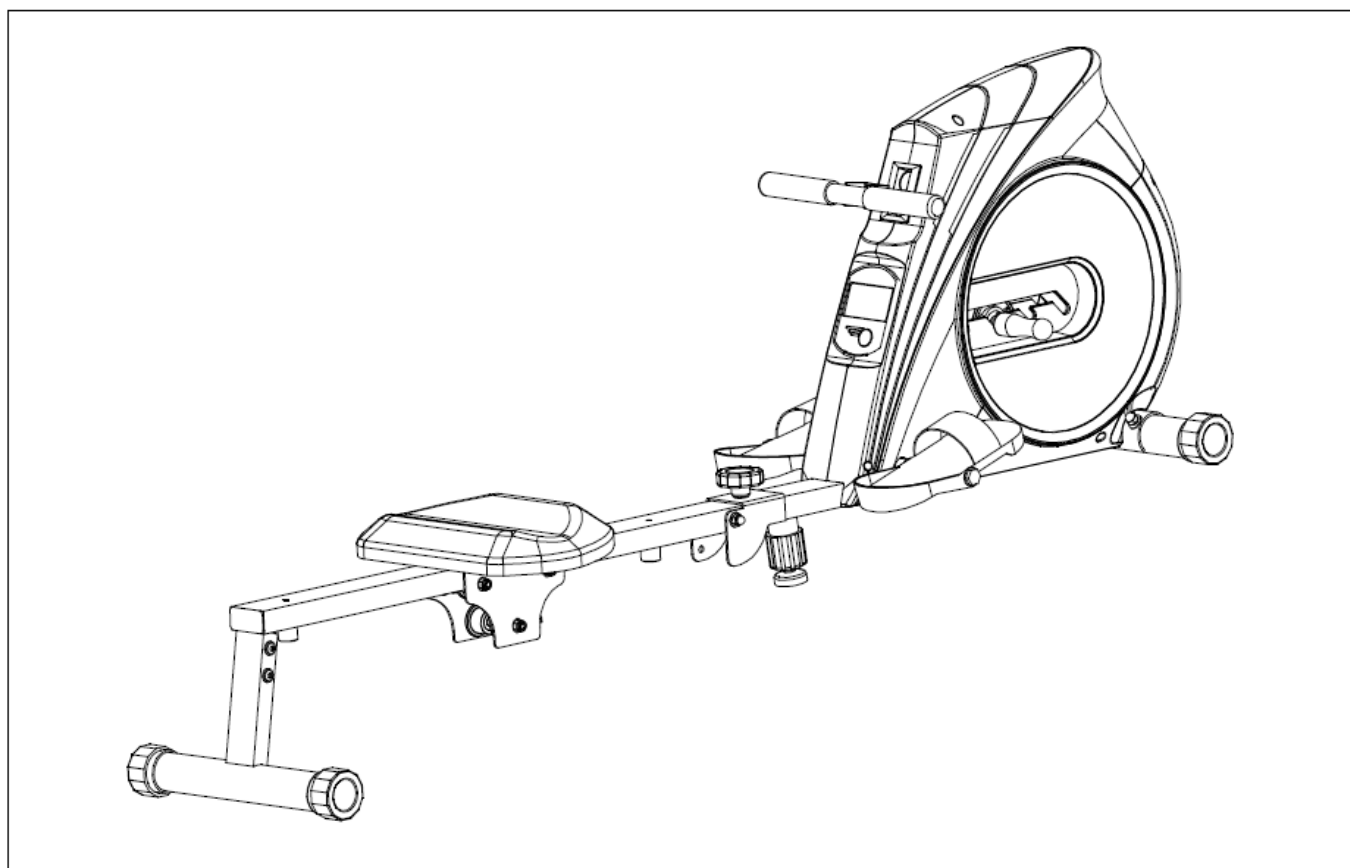


IMPORTANT SAFETY NOTICE

Note the following precaution before assembling or operating the machine

- 1、 Assemble the machine exactly as the descriptions in the instruction manual.**
- 2、 Check all the screws, nuts and other connections before using the machine for the first time and ensure that the trainer is in the safe condition.**
- 3、 Set up the machine in a dry level place and leave it away from moisture and water.**
- 4、 Place a suitable base (e.g. rubber mat, wooden board etc.) beneath the machine in the area of assembly to avoid dirt and etc.**
- 5、 Before beginning training, remove all objects within a radius of 2 meters from the machine.**
- 6、 Do not use aggressive cleaning articles to clean the machine, only use the supplied tools or suitable tools of your own to assemble the machine or repair any parts of machine. Remove drops of sweat from the machine immediately after finishing training.**
- 7、 Your health can be affected by incorrect or excessive training. Consult a doctor before beginning the training program. He can define the maximum setting (Pulse. Watts. Duration of training etc) to which you may train yourself and can get precise information during training. This machine is not suitable for therapeutic purpose.**
- 8、 Only do training on the machine when it is in correct working way. Use only original spare parts for any necessary repairs.**
- 9、 This machine can be used for only one person's training at a time.**
- 10、 Wear training clothes and shoes that are suitable for fitness training with the machine. Your training shoes should be appropriate for the trainer.**
- 11、 If you have a feeling of dizziness, sickness or other abnormal symptoms, please stop training and consult a doctor immediately.**
- 12、 People such as children and handicapped persons should only use the machine in the presence of another person who can give aid and advice.**

-
- 13、 The power of the machine increases with increasing the speed, and the reverse.
The machine is equipped with adjustable knob that can adjust the resistance.
- 14、 The maximum user's weight is 100kg.

EXPLODED DIAGRAM

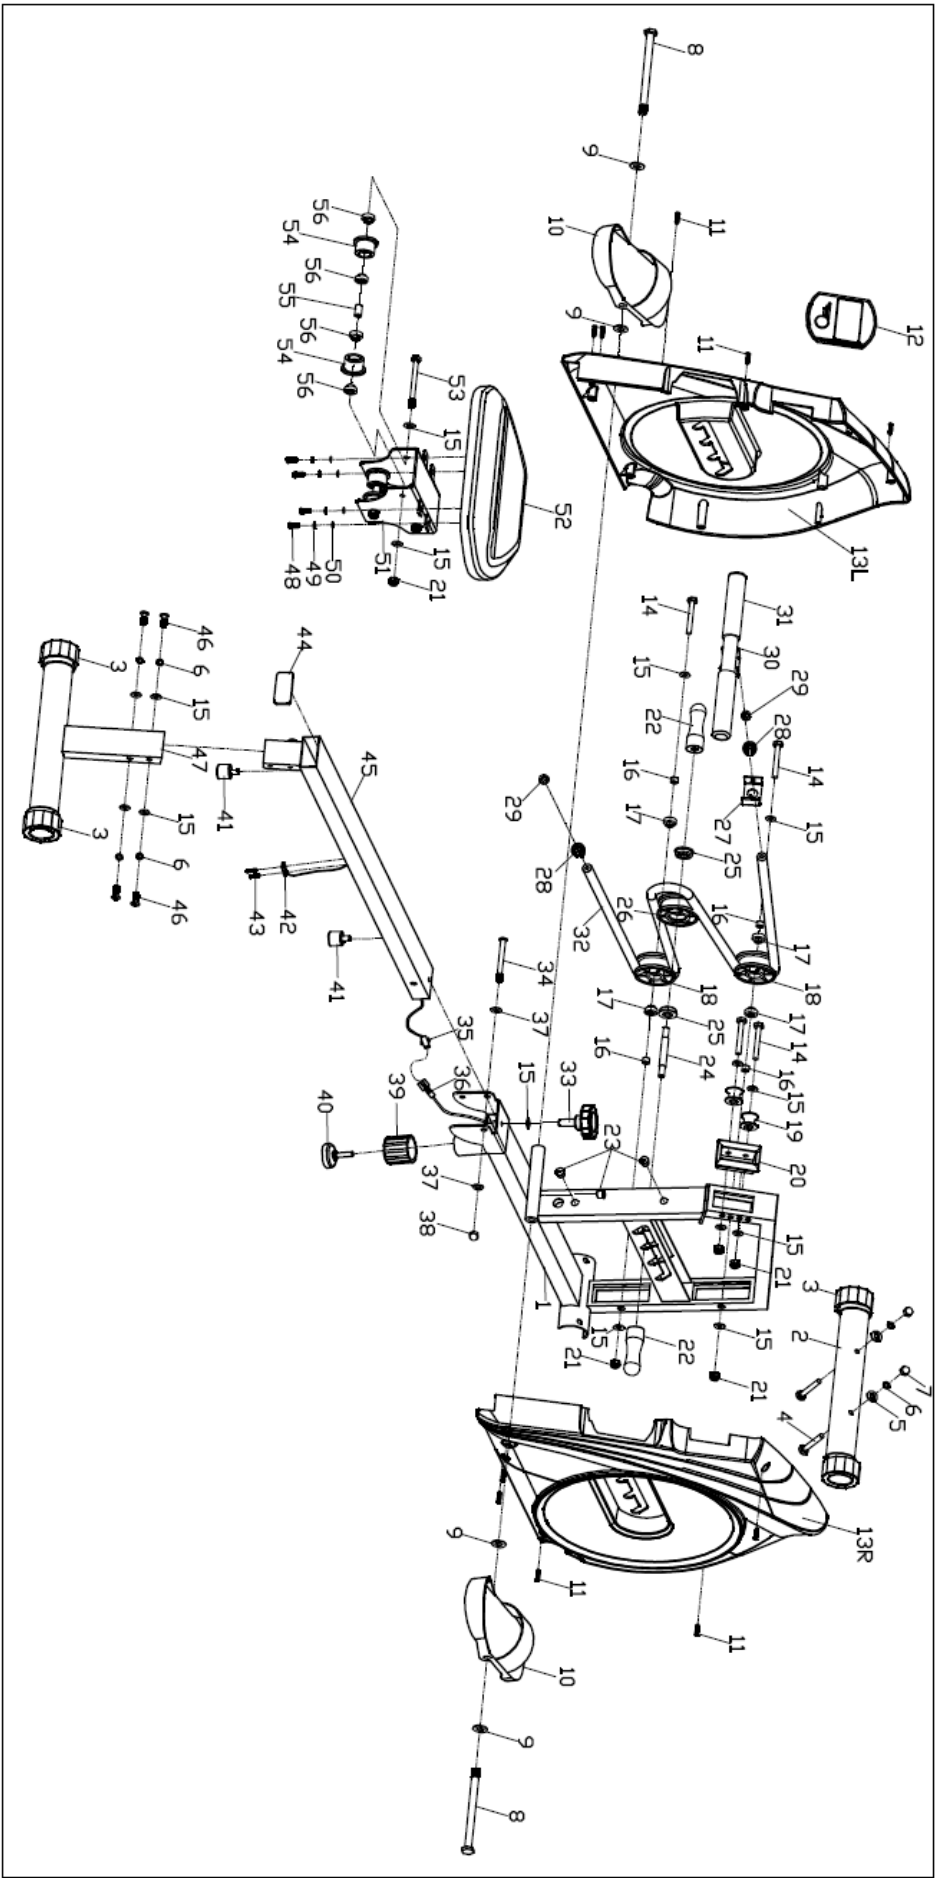


PARTS LIST

No.	Description	Q'ty	No.	Description	Q'ty
1	Main frame	1	29	Plug	2
2	Front stabilizer	1	30	Handlebar	1
3	End cap	4	31	Foam grip	2
4	Bolt M8x65	2	32	Rope	1
5	Arc washer d8x1.5xΦ20xR30	2	33	Bolt	1
6	Spring washer D8	6	34	Bolt M10x80	1
7	Nut M8	2	35	Sensor wire	1
8	Bolt Φ12.5x130xM12x18	2	36	Extended wire	1
9	Flat washer D13xΦ26x2	4	37	Flat washer D10xΦ20x1.5	2
10	Pedal	2	38	Nut M10	1
11	Screw ST4.2x18	10	39	End cap	1
12	Computer	1	40	Adjustable foot pad	1
13L/R	Chain cover	1pr	41	Cushion pad	2
14	Bolt M8x62	4	42	Sensor	1
15	Flat washer D8xΦ19x1.5	19	43	Screw ST3x10	2
16	Bushing Φ12xΦ8.5x10.5	4	44	End cap	1
17	Bearing 608	4	45	Rail tube	1
18	Wheel	2	46	Screw M8x16	4
19	Idler wheel	2	47	Rear support frame	1
20	Fixed sleeve	1	48	Bolt M6x15	4
21	Nylon nut M8	7	49	Spring washer D6	4
22	Handlebar	2	50	Flat washer D6	4
23	End cap	3	51	Saddle post	1
24	Axle M10xΦ12x95	1	52	Saddle	1
25	Bearing Φ32xΦ12x11	2	53	Bolt M8x90	3
26	Wheel	1	54	Wheel	6
27	U-shaped washer	1	55	Bushing Φ12xΦ8x20	3
28	Rope lock	2	56	Bearing	12

ASSEMBLY INSTRUCTION

Step 1:


Fix the handlebar (22) to the axle (24).

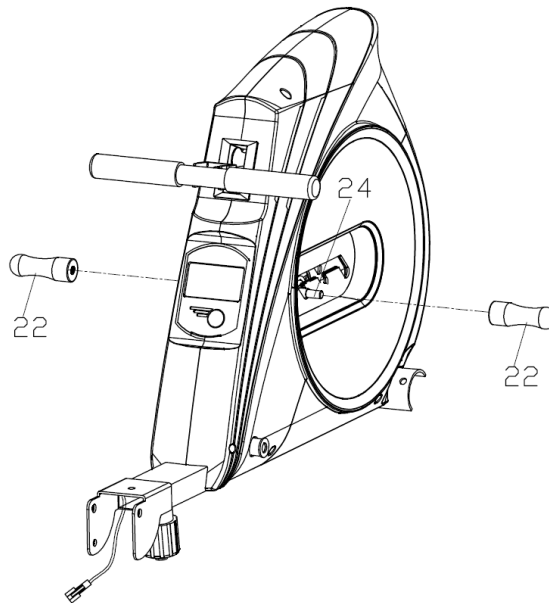

Step 2:


A: Fix the front stabilizer (2) to the main frame (1) with bolt (4) 、 arc washer (5) 、 spring washer (6) and nut (7).

B: Install the adjustable foot pad (40) to the main frame (1) as shown.(Adjust it to the suitable position to connect the rail tube(45))

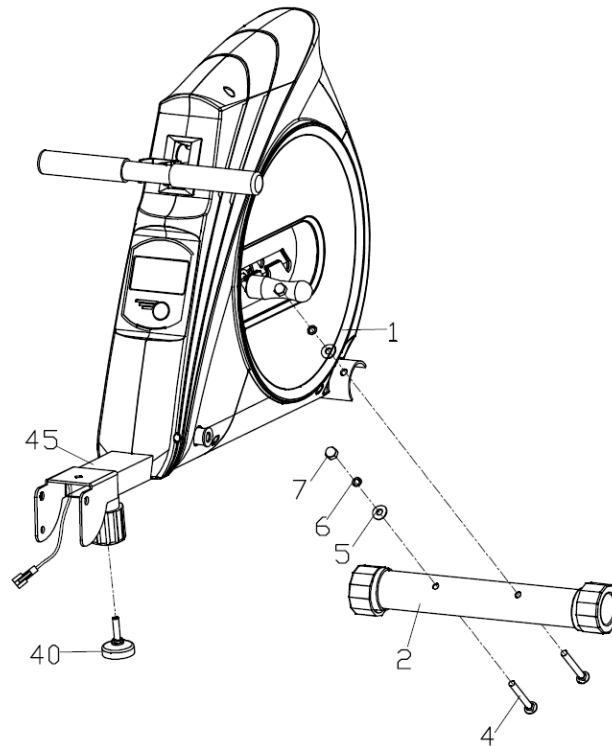

Step 3:

Fix the pedals (10) to the main frame (1) with bolts (8) and flat washers (9).

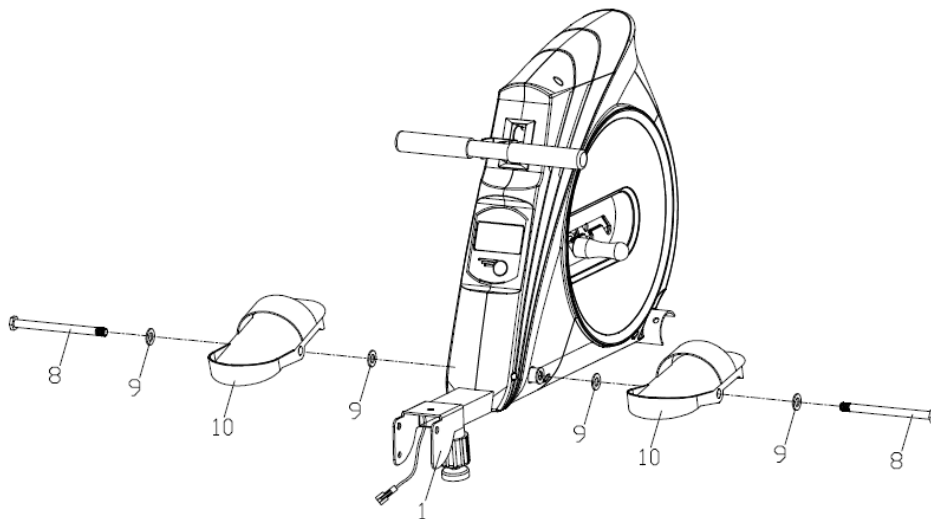


Step 4:

A : Fix the saddle (52) to the saddle post (51) with screws (48) 、 spring washers (49) and flat washers (50).


B: Fix the rear support frame (47) to the rail tube (45) with screw (46)、 spring washers (6) and flat washers (15).

C: Remove the cushion pad (41) firstly, then insert saddle post (51) to rail tube (45), finally fix cushion pad (41) to rail tube (45)

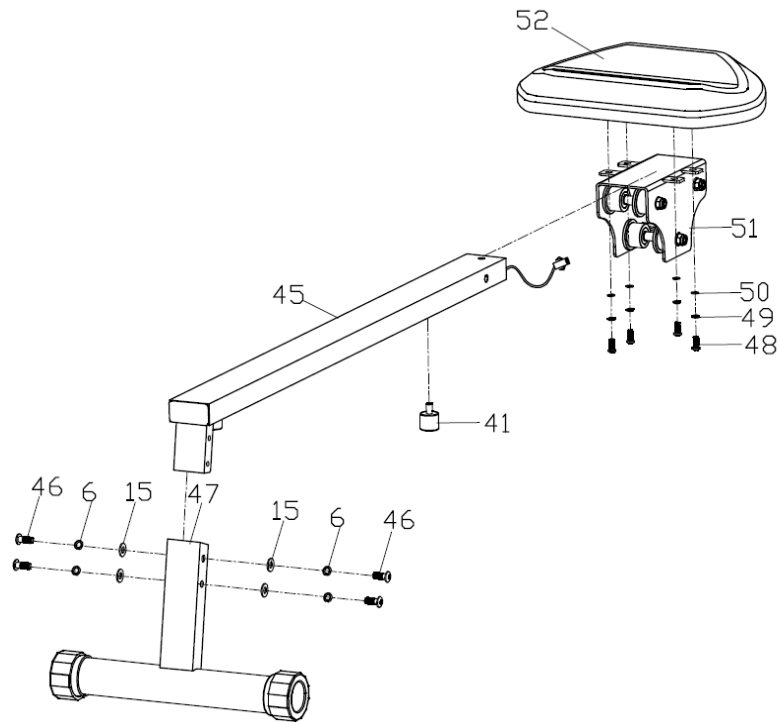


Step 5:

Connect the extended wire (36) to the sensor wire (35), and then fix the rail tube (45) to the main frame (1) with bolts (34), flat washers (37) and nuts (38). And then fix the bolt (33) and the flat washer (15) to the main frame (1).

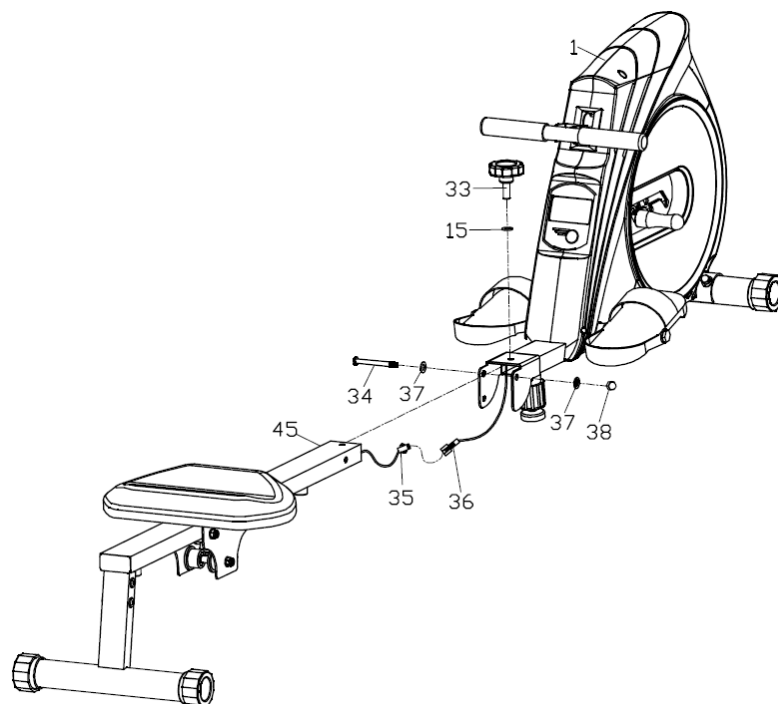

Step 6:

Pull up the handlebar (22) from the groove as arrow shown, pull handlebar (22) forward or backward ,then insert to another groove as arrow shown.

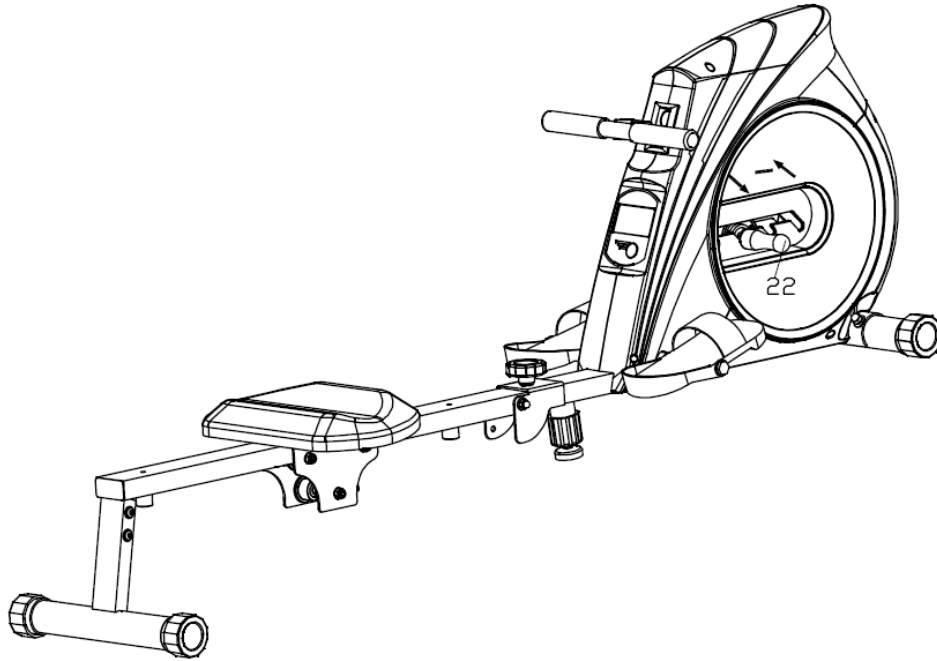

Step 7:

The rowing machine is foldable. Before folding the machine, please take the bolt (33) and flat washer (15) down. You can fix the folded machine by the bolt (33) and flat washer (15) as below.

